
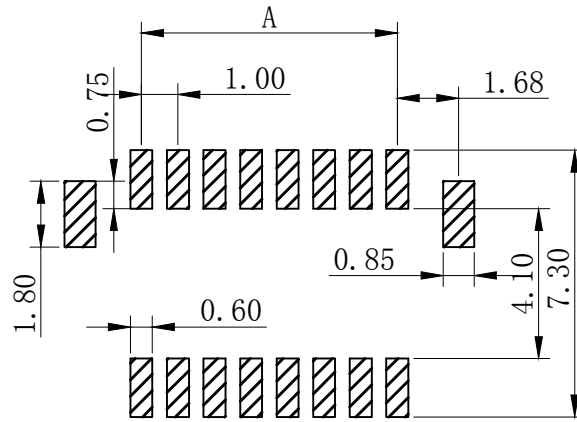
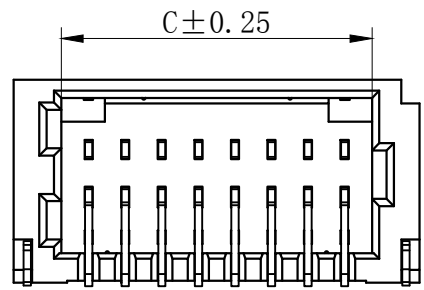
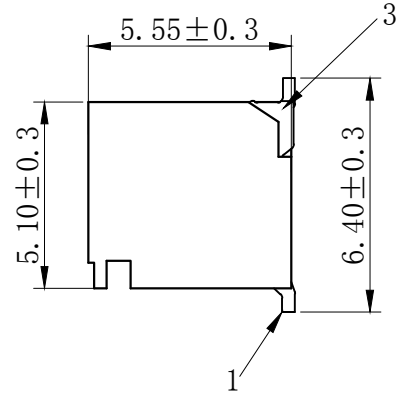


序号	名称	材料
1	插针	磷青铜 (镀金)
2	底座	LCP UL94V-0
3	焊片	磷青铜 (镀锡)

版次	日期	内容

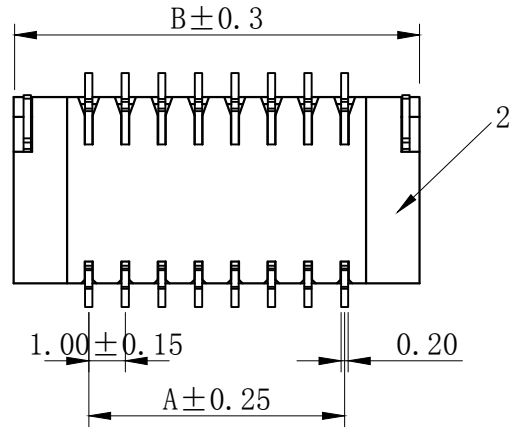

Electrical properties

- 1、Current rating: 1A AC\DC
- 2、Voltage rating: 50V AC\DC
- 3、Temperature range: -25°C to 85°C
- 4、Contact resistance: Initial value/20mΩ max
- 5、Insulation resistance: 100MΩ min
- 6、Withstanding voltage: 500V AC/ minute

孔位 poles	A	B	C
4	1.00	5.10	2.50
6	2.00	6.10	3.50
8	3.00	7.10	4.50
10	4.00	8.10	5.50
12	5.00	9.10	6.50
14	6.00	10.10	7.50
16	7.00	11.10	8.50
18	8.00	12.10	9.50
20	9.00	13.10	10.50
22	10.00	14.10	11.50
24	11.00	15.10	12.50
26	12.00	16.10	13.50
-	-	-	-
50	24.00	28.10	25.50

浙江乐马电气有限公司			设计	张书晨	
尺寸公差	角度公差	品名:	SHD-nAWB	审核	王佳
.X ±0.25	X.° ±3.0°	图号:		10004-AWB	批准
.XX ±0.15	.X° ±2.0°	单位:	比例:		页数:
.XXX ±0.05	.XX° ±1.0°	mm	--	1/1	A